

Power Input

100 - 130 VAC, 50/60 Hz, 5VA
 200 - 240 VAC, 50/60 Hz, 5VA

Signal Input

Accuracy: $\pm 2.0\%$ of full scale at 77°F/25°C
 Thermocouple: Type J or K
 RTD: 3-wire Pt100 DIN or JIS
 Sampling Rate: 3 samples / second
 Cold Junction Compensation: $\pm 0.1^\circ\text{C} / 1^\circ\text{C}$
 Common Mode Rejection Ratio (CMRR): 120 dB
 Normal Mode Rejection Ratio (NMRR): 60 dB
 Sensor Break Protection: Upscale

Output 1

Relay Rating: 240 VAC, 5 Amp
 SSR drive: Pulsed DC, 20 V at 20 mA maximum
 Current Loop: 4 - 20 mA, 0 - 20 mA, maximum load: 500Ω
 Voltage: 0 - 10 VDC, minimum load 500KΩ

Control

Proportional Band: 2.2% of span
 ON-OFF Hysteresis: 1% of span
 Cycle time: 20 seconds for relay output, 1 second for pulsed voltage output, 0.02 second for linear current or voltage output
 Control Action: Reverse Action

Approval Standards

Safety Standard: UL3121-1
 Protective Class: Front panel: IP 30
 Housing and Terminals: IP 20
 EMC: EN61326

Adjustment

Setpoint: Single turn wirewound potentiometer
 Setpoint Resolution: 0.2% of span
 Accuracy of Setpoint: $\pm 2\%$ of span
 Repeatability of Setpoint: $\pm 0.1\%$ of span


Display

Process Indicator: TEC-902: Hi/Lo LED indicators
 TEC-901: None
 Status Indicator: ON (red) LED lamp, OFF (green) LED lamp

Environmental and Physical

Operating Temperature: 32 to 122°F (0 to 50°C)
 Humidity: 0 to 90% RH, non-condensing
 Dielectric Strength: 2000 VAC, 50/60 Hz for 1 minute
 Vibration: 10 - 55 Hz, amplitude 1 mm
 Shock: 200 m/s² (20g)
 Dimensions: 1-7/8 × 1-7/8 × 3-3/4" (48 × 48 × 94 mm) H×W×D
 Depth behind panel: 3-3/8" (86 mm)
 Panel Cutout: 1-25/32" × 1-25/32" (45 × 45 mm) H×W
 Weight: 0.42 lb. (190 grams)

Rear Terminal Connections

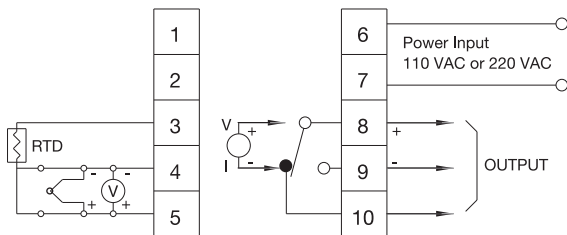

Non-Indicating TEC-901 Stock and Common Part Numbers (Power Input: 200-240 VAC, Proportional mode)

Part Number	Signal Input	Range	Output
TEC17101	J tc	50-850°F	relay
TEC17102	J tc	50-550°F	relay
TEC17103	K tc	50-850°F	relay
TEC17104	K tc	50-550°F	relay
TEC17105	RTD	50-550°F	relay
TEC17106	J tc	0-300°C	relay
TEC17107	J tc	0-600°C	relay
TEC17108	K tc	0-300°C	relay
TEC17109	K tc	0-600°C	relay